
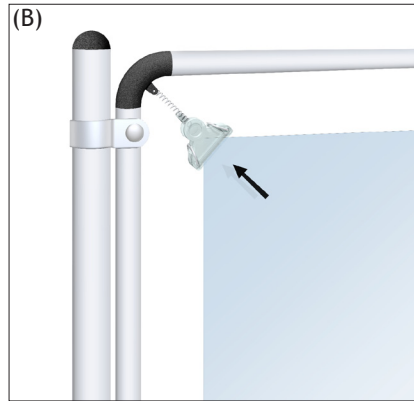


# Clipster™ Stands

1. Screw bottom poles onto poles with attached frame sections.
2. Screw bases on using flathead screws.
3. Attach bottom crossbar between uprights using philips head screws.
4. Align attached frames parallel to bottom crossbar.
5. Assemble frames into corner brackets (fig. A).
6. Insert graphics into 4 corner clips (fig. B).

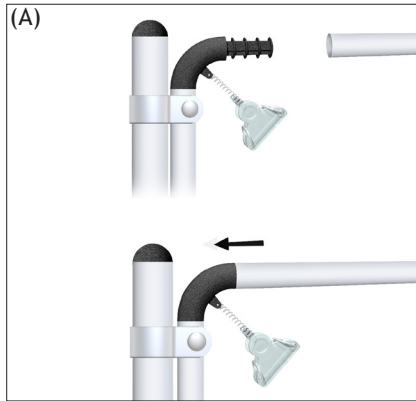

Spring tension holds graphic in place  
(maximum .020 point graphic thickness).

## Applicable Products:

UDP1, UDP2, UDP3

